


Wheel report from March 2025, wheel thickness  
may vary +/- 1/16"

# Wheel Information

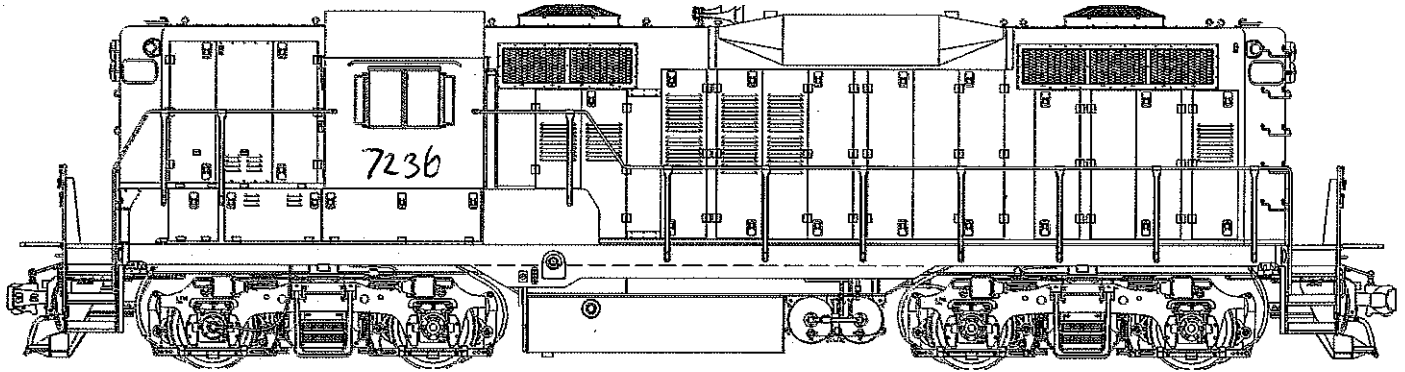

R4


R3

R2

R1

HEIGHT	Pass 0"	Pass 2"
THICKNESS	7 on 0	7 on 0

Pass 1 15/16"	Pass 2"
7 on 0	7 on 0

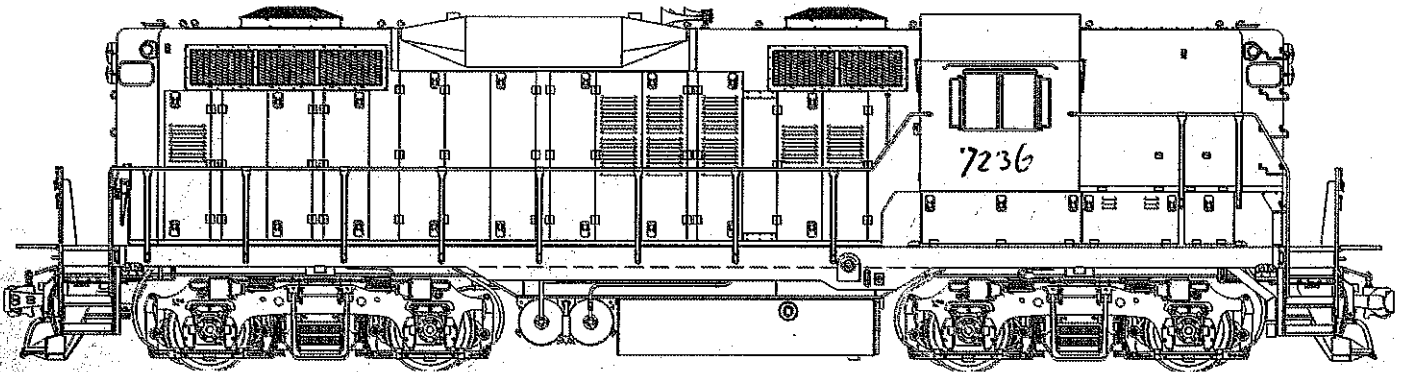

L1

L2

L3

L4

HEIGHT	Pass 2"	2"
THICKNESS	6 on 0	6 on 0

Pass 2"	Pass 2"
6 on 0	6 on 0

<p>0 on 0 = 1" 0 on 1 = 1-1/16" 0 on 2 = 1-2/16" 0 on 3 = 1-3/16" 0 on 4 = 1-4/16" 0 on 5 = 1-5/16" 0 on 6 = 1-6/16" 0 on 7 = 1-7/16"</p> <p><b>FLANGE HEIGHT MEASUREMENT</b></p>	<p>0 on 0 = 1-17/64" 1 on 0 = 1-15/64" 2 on 0 = 1-7/32" 3 on 0 = 1-5/32" 4 on 0 = 1-7/64" 5 on 0 = 1-3/64" 6 on 0 = 1-1/32" 7 on 0 = 5/64" 8 on 0 = 15/16"</p> <p><b>FLANGE THICKNESS MEASUREMENT</b></p> <p><b>RIM THICKNESS MEASURE POINT</b></p>	<p><b>METHOD TO MEASURE VERTICAL FLANGE</b></p> <p>TO CONDEMN WHEEL, MEASURING POINT MUST TOUCH FLANGE</p>	<p><b>Method To Measure Broken Rim - Heavy Flange</b></p> <p><b>Method To Measure Flat &amp; Shell Spots</b> FRA Max. 2-1/2"</p> <p><b>METHOD TO MEASURE FLANGE THICKNESS</b></p>
---	---	--	---